

CROMPTON INSTRUMENTS 254-TXX



PALADIN ADVANTAGE UNIVERSAL PROGRAMMABLE TRANSDUCER

RELEVANT STANDARDS AND TEST REPORTS

- IEC 61326
- IEC 61010-1
- IEC62053-21
- EN60688
- RoHS Compliant
- UL Certified

KEY FEATURES



- DIN-rail enclosure
- Measurement, isolation & conversion of up to 31 electrical parameters
- RS485 Modbus RTU protocol as standard
- Ethernet or USB options
- Versatile programmable relay output
- Programmable VT/CT ratio
- True rms measurement
- User programmable configuration
- Linear or Dual Slope Outputs
- User friendly programming interface

TE Connectivity's (TE) Crompton Instruments Paladin Advantage, 254-TXX is a programmable transducer which provides measurement, isolation and conversion of all main electrical parameters into an industry standard DC output signal. The 254-TXX can be used in single and three-phase balanced or unbalanced three or four-wire electrical systems.

The 254-TXX has an accuracy of CL0.2 and includes RS485 Modbus RTU communications protocol and pulse/alarm output as standard. The 254-TXX is an accurate device for the conversion of all main electrical parameters into 2 or 4 fully isolated Voltage or mA outputs.

Designed, developed and manufactured in the UK, with an integrated microprocessor for exceptional handling of distorted waveforms. The 254-TXX is ideal for low, medium and high voltage applications and provides a high protection against continuous and short circuit protection as well as galvanically isolated inputs and outputs

DIMENSIONAL INFORMATION

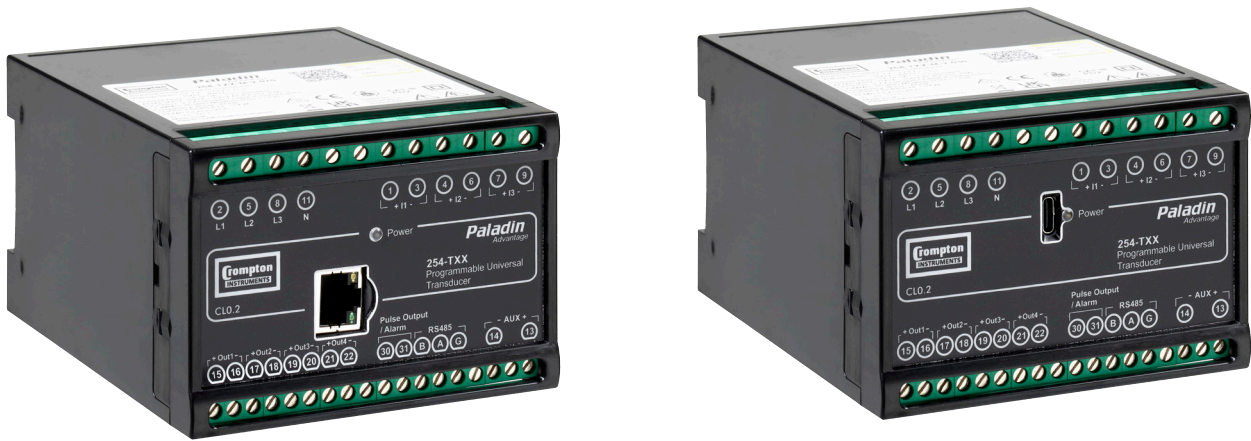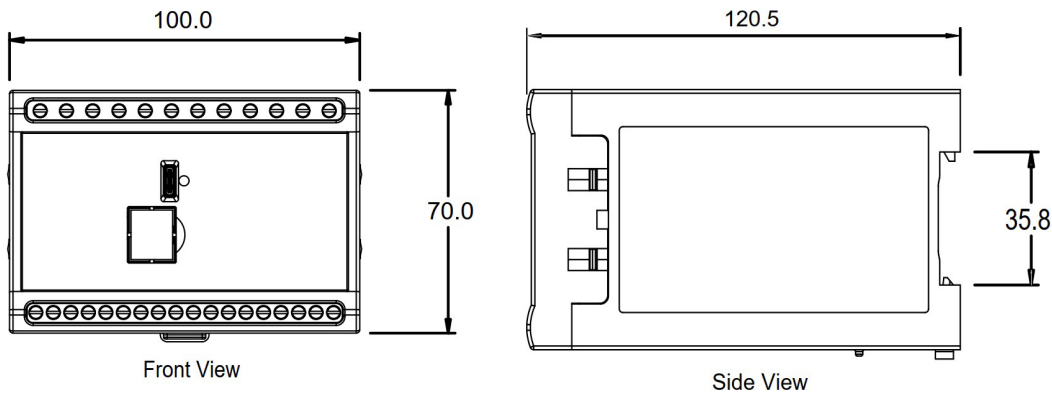

Product selection		
Product Code	Outputs	Auxiliary
254-TXX-M-2-030	2x Analogue, USB	100-250V AC/DC
254-TXX-M-2-070	2x Analogue, Ethernet	
254-TXX-M-4-030	4x Analogue, USB	
254-TXX-M-4-070	4x Analogue, Ethernet	
254-TXX-L-2-030	2x Analogue, USB	12-48V DC
254-TXX-L-2-070	2x Analogue, Ethernet	
254-TXX-L-4-030	4x Analogue, USB	
254-TXX-L-4-070	4x Analogue, Ethernet	

The Paladin 254-TXX is a programmable Transducer. For initial programming or reprogramming of an existing product please use the Compton Instruments Transducer Configurator software.


Make sure that you have the latest version of Transducer Configurator software installed on your computer. You can download the latest version at:




<https://www.te.com/en/private/energy/crompton-software-downloads-254-TXX-programmable-transducer.html>

WIRING DIAGRAMS


SINGLE PHASE

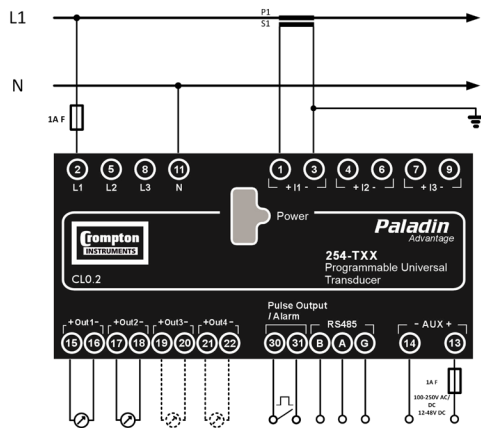


THREE PHASE THREE WIRE BALANCED LOAD

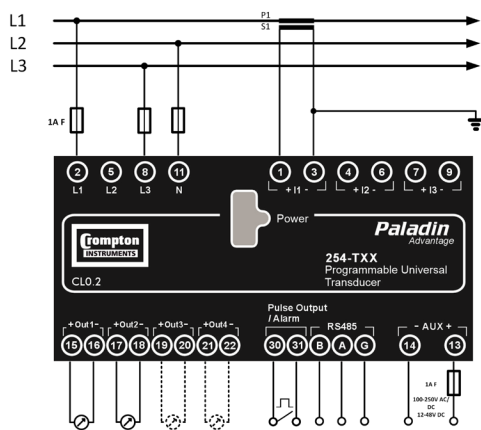


THREE PHASE THREE WIRE UNBALANCED LOAD

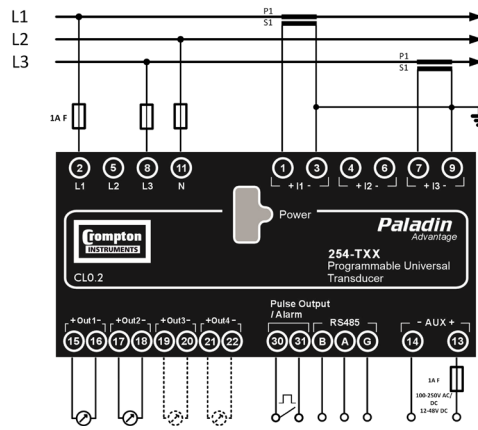

THREE PHASE FOUR WIRE BALANCED LOAD

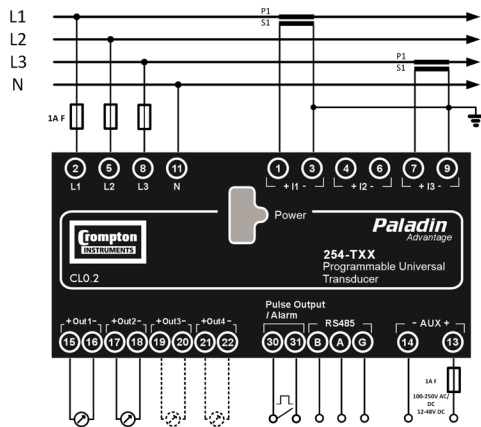

THREE PHASE FOUR WIRE UNBALANCED LOAD

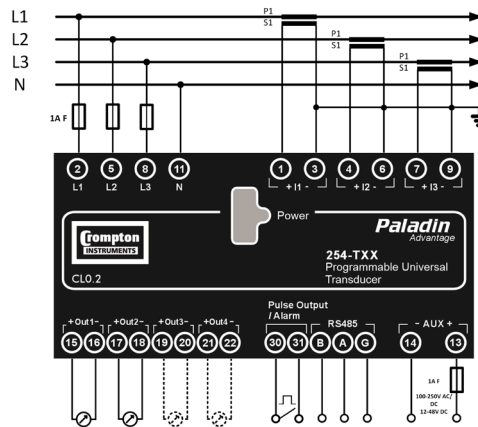

Technical Specifications

Input											
Nominal input voltage	57.7 V – 277 V AC L-N (100 – 480 V L-L) 480 V MAX										
Max. Continuous input overload voltage	120% of nominal										
Max. Short duration input voltage (300 msec)	2 x nominal voltage										
Nominal input voltage burden	< 0.1 VA per phase										
Nominal input current	1A AC or 5A AC rms										
Nominal input current burden	< 0.1 VA per phase										
Max. Continuous input overload current	2 x nominal current										
Max. Short duration input current (300 msec)	20 x nominal current										
Auxiliary											
Operating range	100 – 250 V AC/DC (+/- 20%) 45 – 65 Hz or 12 – 48 V DC (+/- 20%)										
Supply burden	<15VA / <5VA										
Accuracy											
Voltage (V)	< 0.2%										
Current (A)	< 0.2%										
Neutral current calculated (A)	< 1.0%										
Frequency (Hz)	< 0.1 Hz										
Power factor (PF)	1% of unity										
Active power (W)	+/- 0.2% of range										
Reactive power (VAr)	+/- 0.2% of range										
Apparent power (VA)	+/- 0.2% of range										
Active energy (kWh)	Class 0.2 (IEC 62053-21)										
Reactive energy (kVArh)	+/- 0.2% of range										
Response time	<200 msec										
Range											
Voltage (V)	5% to 120% for nominal										
Current (A)	5% to 120% of nominal										
Frequency	45 – 65 Hz										
THD	2% up to 63rd harmonic										
Outputs											
Analogue output	<table border="0"> <tr> <td>0... +/- 1 mA</td> <td>0... +/- 1 V</td> </tr> <tr> <td>0... +/- 5 mA</td> <td>2... +/- 10 V</td> </tr> <tr> <td>0... +/- 10 mA</td> <td></td> </tr> <tr> <td>0... +/- 20 mA</td> <td></td> </tr> <tr> <td>4... +/- 20 mA</td> <td></td> </tr> </table> <p align="center">All programmable</p>	0... +/- 1 mA	0... +/- 1 V	0... +/- 5 mA	2... +/- 10 V	0... +/- 10 mA		0... +/- 20 mA		4... +/- 20 mA	
0... +/- 1 mA	0... +/- 1 V										
0... +/- 5 mA	2... +/- 10 V										
0... +/- 10 mA											
0... +/- 20 mA											
4... +/- 20 mA											
Pulse/alarm output relay	User defined solid state relay										
Contact rating	100 mA @ 50 V										
Pulse duration	20 msec to 300 msec										
Alarm delay	0 – 120 secs										
Alarm hysteresis	1 – 99%										
Alarm type	User Defined Solid State Relay										
Communication protocol	RS485 Modbus RTU (USB / Ethernet Options)										
Type	2-wire half duplex										
Baud rate	2400, 4800, 9600, 19200, 38400										
Enclosure											
Enclosure style	DIN-rail mounting										
Dimensions	120(H) x 100(W) x 70(D) mm										
Material	Polycarbonate to UL94-V0										
Weight	0.50 kg										
Terminals	Shrouded screw-clamp 0.05 – 4 mm wire										
Environment											
Operating temperature	-10°C to +55°C										
Storage temperature	-30°C to +70°C										
Relative humidity	0 – 90% non-condensing										
Shock	30 g in 3 planes										
Vibration	10 Hz to 50 Hz										
Dielectric voltage	Withstand test 4 kV, 50 Hz for 1 minute between auxiliary/input/output										

PARAMETERS

Parameters		
Parameter	Description	Analogue Output
V1	Phase 1 Voltage	✓
V2	Phase 2 Voltage	✓
V3	Phase 3 Voltage	✓
I1	Phase 1 Current	✓
I2	Phase 2 Current	✓
I3	Phase 3 Current	✓
W1	Phase 1 Watts	✓
W2	Phase 2 Watts	✓
W3	Phase 3 Watts	✓
Var1	Phase 1 Vars	✓
Var2	Phase 2 Vars	✓
Var3	Phase 3 Vars	✓
VA1	Phase 1 VA	✓
VA2	Phase 2 VA	✓
VA3	Phase 3 VA	✓
VLL12	Phase 1-2 Voltage	✓
VLL23	Phase 2-3 Voltage	✓
VLL31	Phase 3-1 Voltage	✓
PF1	Power Factor Phase 1	✓
PF2	Power Factor Phase 2	✓
PF3	Power Factor Phase 3	✓
PA1	Phase Angle Phase 1	✓
PA2	Phase Angle Phase 2	✓
PA3	Phase Angle Phase 3	✓
VLN Avg	Average L/N Voltage	✓
VLL Avg	Average L/L Voltage	✓
I Sum	System Current Total	✓
I Avg	Average System Current	✓
W Sum	System Power Total	✓
VAr Sum	System Reactive Power Total	✓
VA Sum	System VA Total	✓
Sys Hz	System Frequency	✓
PF Avg	System Power Factor	✓
THD V1	Phase 1 V THD %	✓
THD V2	Phase 2 V THD %	✓
THD V3	Phase 3 V THD %	✓
THD I1	Phase 1 I THD %	✓
THD I2	Phase 2 I THD %	✓
THD I3	Phase 3 I THD %	✓

137 Further Electrical Parameters available through Modbus

crompton-instruments.com

Learn more: TE.com/energy

© 2024 TE Connectivity. All Rights Reserved. EPP-4523-DDS-10/25-245-TXX

TE, TE Connectivity, TE connectivity (logo), EVERY CONNECTION COUNTS, are trademarks owned or licensed by TE Connectivity. Other logos, product and company names mentioned herein may be trademarks of their respective owners. While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions, specifications, and/or information contained herein are for reference purposes only and are subject to change without notice. Consult TE for the latest dimensions, specifications, and/or information. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

Connect with us:

TE.com/energy