



## Energy Division

# Class PX Current Transformers

In some balanced protection systems where sensitivity and stability levels required are high, classes 5P10 or 10P10 may not be adequate. In these situations a Class PX current transformer will usually be specified. Class PX as defined in IEC60044-1/BSEN60044-1 allows the manufacturer of a protection device to detail more specific requirements of the current transformer so as to achieve a more sensitive protection scheme. Typically this will involve specifying the following information for the current transformer:

- 1) Turns ratio
- 2) Minimum kneepoint voltage
- 3) Maximum secondary resistance
- 4) Maximum excitation current at the rated minimum kneepoint voltage

To enquire about Class PX current transformers consult the factory with the above information together with any physical limiting dimensions and the aperture size required. If not all the above information is available, details of relay type, lead run from current transformer to relay and the fault current expected to flow through the zone protected by the current transformers will be required in order to provide a quotation.

## Product codes


Part number	Ratio	Class	Vk	$\Omega$ at 75°C	Dimensions		
					A	B	C
81X-9412-501388	800/5	PX	52	0.35	65	135	65
81X-9412-501795	1000/5	PX	62	0.31	80	150	65
81X-9412-501802	1250/5	PX	85	0.45	90	160	65
81X-9412-501386	1600/5	PX	80	0.5	115	190	55
81X-9412-501902	2500/5	PX	112	0.6	120	192	52
81X-9412-216148	2500/5	PX	124	0.78	119	191	52

## Specifications

System voltage	720V maximum
Test voltage	3kV for 1 minute
System frequency	50/60Hz
Service temperature	-20°C to 70°C
Humidity	Up to 95% RH (non condensing)
Insulation class	BS2757 Class Y
Compliant with	Ring Type CT BSEN60044-1:1999



## Dimensions

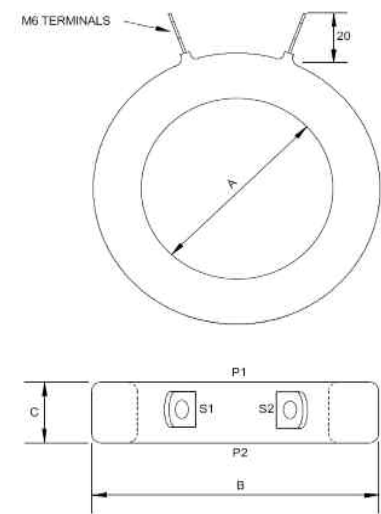

While Tyco Electronics and its affiliates referenced herein have made every reasonable effort to ensure the accuracy of the information contained in this catalogue, Tyco Electronics cannot assure that this information is error free. For this reason, Tyco Electronics does not make any representation or offer any guarantee that such information is accurate, correct, reliable or current. Tyco Electronics reserves the right to make any adjustments to the information at any time. Tyco Electronics expressly disclaims any implied warranty regarding the information contained herein, including, but not limited to, the implied warranties of merchantability or fitness for a particular purpose. Tyco Electronics' only obligations are those stated in Tyco Electronics' Standard Terms and Conditions of Sale. Tyco Electronics will in no case be liable for any incidental, indirect or consequential damages arising from or in connection with, including, but not limited to, the sale, resale, use or misuse of its products. Users should rely on their own judgement to evaluate the suitability of a product for a certain purpose and test each product for its intended application. TE (logo) and Tyco Electronics are trademarks of the Tyco Electronics group of companies and its licensors. Crompton is a trademark of Crompton Parkinson and is used by Tyco Electronics under a licence. Other Trademarks mentioned herein are the property of their respective owners.

**Energy Division – economical solutions for the electrical power industry: cable accessories, connectors & fittings, electrical equipment, instruments, lighting controls, insulators & insulation enhancement and surge arresters.**

**Tyco Electronics UK Ltd**  
 Energy Division  
 Freebournes Road  
 Witham, Essex CM8 3AH

Phone: +44 (0)870 870 7500  
 Fax: +44 (0)870 240 5287  
 E-mail: [electrical@tycoelectronics.com](mailto:electrical@tycoelectronics.com)

[www.crompton-instruments.com](http://www.crompton-instruments.com)

 **Tyco Electronics**  
 Our commitment. Your advantage.